





Denim | Light Grey PF6-126 and Light Grey PF6 Combination **Brick (Horizontal) Installation**





INSPIRATION | The beauty of nature appears both purposeful and accidental. This mix of randomness and order provides the unique patterns that only nature can create.


Denim | Light Grey PF6-126 and Light Grey PF6 Combination Brick (Horizontal) Installation

1



Denim | Light Grey PF6-126 and Light Grey PF6 Combination Brick (Horizontal) Installation INSPIRATION | Our design journey started with a single organic pattern and progressed with the exploration and adjusting, dispering and defining scale.

Here and the second second

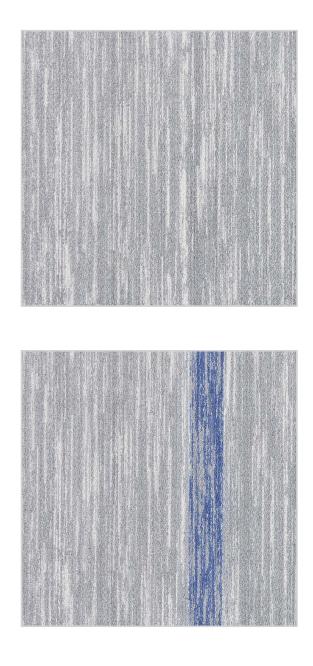





Pear | Ink PF133-62 and Ink PF133 Combination Brick (Horizontal) Installation INSPIRATION | A common thread of bright accents further illumnitaes this dynamic shifting, providing designers with boundless opportunities to define space.

Pear | Ink PF133-62 and Ink PF133 Combination Brick (Horizontal) Installation




COLOURWAY

COMMON THREAD 2 | POINT 5



Light Grey PF6



Denim | Light Grey PF6-126



Cool Grey PF68





Magenta | Cool Grey PF68-137

Charcoal PF79



Smokey Grey PF145



Mustard | Smokey Grey PF145-105

Navy PF118



Tangerine |Navy PF118-135




Ink PF133

Common Thread 2 is only offered in Point 5. Point 3 and Point 8 are available as a Design Request (DR) and also in different colours (minimum 350m2). Block colours are available to break up the texture - Colour Compositions and Colour Connect will compliment Common Thread 2.





Ruby | Charcoal PF79-169



Pear | Ink PF133-62

COMMON THREAD 2 | POINT 5

SPECIFICATION

Construction Tufted, Textured Loop

Tile Size 50cm × 50cm

Yarn Type Milliken Certified Wear-On® Nylon Type 6,6

Stain Repel / Stain Resist / Soil Release StainSmart®

Antimicrobial AlphaSan® AF Built-In Protection †

Dye Method Millitron®

Tufts 144/in² (2,230/100 cm²)

Gauge 1/10

Stitches Per Inch 14.4 Standard Backing WellBAC[™] Comfort (non-reactive cushion backing)

Recycled Content by Total Weight 26% Pre-Consumer

Nominal Total Thickness 0.29" (7.5 mm)

Nominal Total Weight 103 oz/yd² (3,500 g/m²)

Flammability (Radiant Panel Test) CRF = 6.8kW/m2; Smoke = 287%.min

Indoor Air Quality - CRI Green Label Plus™ GLP0793, Carpet Catergory 5Y

Applicable Warranties 15 year wear warranty 15 year dimensional stability warranty 15 year anti-static warranty 15 year castor chair wear warranty Recommended Installation Method(s)













Australia Toll Free: 1800 668372

New Zealand Toll Free: 0800 668372 \dagger Contains AlphaSan® antimicrobial treatment to reduce the growth of bacteria, mold and mildew that can cause odours or staining.

This Milliken product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice.

WWW.ONTERA.COM.AU

© 2018 Milliken & Company | Design © Milliken & Company | Made in Australia





green building council australia

Declare.







Growing greener for over 100 years. Visit milliken.com for more information.

Cover image Ditty Ketting (Netherlands, b1952) Untitled 375 2012, acrylic on linen, 42×56 cm courtesy Rocket Gallery, London