



INSPIRED. INSPIRING.

As a fast paced, highly driven and environmentally conscious society develops, we seek collections that stand out, are relevant and surpass the norm.

Tonal variations with soft contrasting textural patterns.

Distinct and highly functional colour selections. Technically superior in construction – all with the comfort and wellness attributes of cushion backing.

Designed to Exceed expectations.




























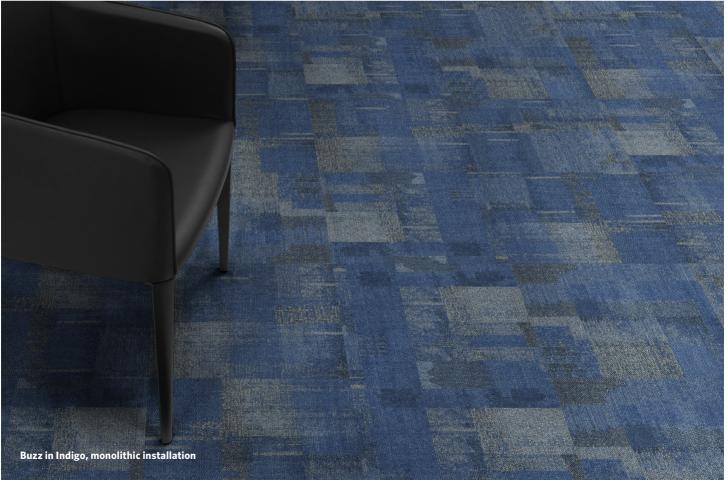



Ontera
Cushion Backed Product

Ontera
Non-Reactive Standard Adhesive

- Installation after 90 days of newly poured concrete
- No moisture testing required
- Fully Warranted

ONTERA MODULAR CARPET IS A MOISTURE MITIGATION SOLUTION ALL BY ITSELF.

Unlike with hardback products, water vapour has a way to escape from beneath Ontera's cushion backing. It travels freely through our open-cell cushion, evaporating naturally through seams at the edges of each carpet tile.



- Handles concrete with a higher RH than other products
- Products have no PH or RH limits
- No moisture testing is required

For more information please contact your local sales representative or call or email us at: +61 (02) 8838 2500 (Aus) · 0800 668372 (NZ) · onteracustomerservice@milliken.com · ontera.com.au

COLOURLINE

Action



ACT170 INDIGO



ACT6 ASH GREY



ACT144 DESERT



ACT13 SMOKEY BLACK

Energy



ENE170 INDIGO



ENE6 ASH GREY



ENE144 DESERT



ENE13 SMOKEY BLACK

Buzz



BUZ170 INDIGO



BUZ6 ASH GREY



BUZ144 DESERT



BUZ13 SMOKEY BLACK





SPD170 INDIGO



SPD6 ASH GREY



SPD144 DESERT



SPD13 SMOKEY BLACK





Colours indicated with this symbol are included in the 10 Day Quick Ship program – up to 1000 square metres, available for despatch within 10 working days of order placement.

EXCEED

SPECIFICATION

Construction

Tufted, Textured Loop

Tile Size

 $50 \text{ cm} \times 50 \text{ cm}$

Yarn Type

Milliken Certified Wear-On® Nylon Type 6,6

Antimicrobial

AlphaSan® AF Built-In Protection†

Dye Method

Millitron®

Tufts

117.6/in² (1,821/100cm²)

Standard Backing

Underscore[™]ES Cushion (PVC Free)

Nominal Total Thickness

7.4mm

Nominal Total Weight

 $89 \text{ oz/yd}^2 (3,024 \text{ g/m}^2)$

Indoor Air Quality

Pass (ISO10580:2010.)

ACCS Grading

Contract Extra Heavy Duty and Stairs (CEHDS)

ECS - Environmental Certification Scheme

Level 4 Certification

Applicable Warranties

15 Year Product Warranty

Installation Method(s)



Monolithic

Action Buzz Speed



Brick Horizontal

Energy









Alliance Founding Member









Australia

Toll Free: 1800 668372

New Zealand

Toll Free: 0800 668372

† Contains AlphaSan® antimicrobial treatment to reduce the growth of bacteria, mold and mildew that can cause odours or staining.

This Milliken product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice.



Growing greener for over 100 years.
Visit milliken.com for more information.

Cover image

Passing Train Abstraction, by Spacedrone808 © 2017 Adobe Stock