

100% WATERPROOF FOR ALL AREAS OF YOUR HOME

QUIET & COMFORTABLE UNDERFOOT

HIGHLY DURABLE FOR YEARS OF ENJOYMENT

QUALITY HYBRID & VINYL FLOORING WITH REALISTIC DESIGNS

Beautiful, comfortable

Titan flooring will help you to create a space that you will love coming home to. Whether you need an extra-resilient floor that can handle your family's demanding routines, or a trendy new statement for your next renovation.



Waterproof

- 100% waterproof flooring panels
- Suitable for bathrooms, laundries & kitchens
- Resists most all household spills



Matching Accessories

• Matching accessories for Titan Hybrid ranges for a beautiful finish

Quiet & comfortable • Excellent footfall sound reduction

- Simply more comfortable underfoot



 \checkmark

Phthalate

free

Scratch resistant

- Resistant to scratching and marking
- Strong wear layer to protect from everyday wear and tear



- 100% ortho-phthalate free
- Safe for the whole family to live on



Family friendy

• Built to withstand daily wear and tear



Realistic designs

- A range of exclusive designs, including stunning Australian wood species decors
- Generous plank size with incredible authenticity

& practical

The Titan range includes 2mm and 5mm glue-down vinyl plank and two generously sized hybrid plank flooring ranges. Titan Hybrid is a rigid core flooring product with integrated underlay. It has all the benefits of vinyl while requiring far less subfloor preparation and installation time.



Easy to clean

- Low maintenance due to its protective coating & matt finish
- Wet mop friendly



Impact resistant

• More indentation resistant than many other hard flooring options



Compatible with floor heating

• Can be installed over in-slab floor heating systems with a subfloor temperature up to 27°C degrees (refer to installation instructions)



Pet friendly

• Muddy paws and little accidents... no problem!



Low impact noise *

• Titan Hybrid has achieved a 6 star rating for multistorey noise, making it ideal for apartment living.



Uniclic[®] installation system *

- Fastest and easiest installation system
- Can be walked on during and immediately after installation







Titan Hybrid is a rigid core plank with a highly resilient surface structure. Almost as beautiful as real timber but far more tolerant to water, scratches and indentation. The extra wide and long planks in the XXL range provides a generous reveal that exudes style in any open space.





Driftwood

River Sand Oak

TIRXXL907



Midland Oak

TIRXXL906 Pale Slate

Washed Oak

TIRXXL942

TIRXXL949



Antricite Oak

Blackbutt Select TIRXXL1002



Tasmanian Oak



Spotted Gum

TIRXXL1042 Brush Box

20

Year wear

warranty

TIRXXL1044

Titan Hybrid XXL 1800 x 225 x 6mm | with bevel $1 \text{ box} = 1.62 \text{m}^2 = 4 \text{ planks}$




11111

UNICLIC



Equally magnificent in a smaller, narrower format is Titan Hybrid. This range of carefully chosen designs, rigorously tested for durability, will stay beautiful for years to come.





TIR169

TIR171

TIR179

TIR181



Stonewashed Spotted Gum TIR170



Alpine Grey Ash



Frosted Ironbark

Spring Valley Oak

Bleached Blackbutt



Sandblasted Blackbutt



Moonlight Gum

TIR182 Warm Urban Oak






1500 x 180 x 6mm | with bevel $1 \text{ box} = 1.62 \text{m}^2 = 6 \text{ planks}$



Residential use









Titan Vinyl Comfort glue-down planks will bring a sleek and modern look to your home. Featuring a generous 5mm thickness for superb underfoot comfort and quietness and an extra-thick wear layer to withstand the rigours of daily life.





Cottage White





Country Oak



Spotted Gum

Rustic Oak

TIC038

TIC001

TIC035



Titan Vinyl Comfort 1505 x 185 x 5mm | no bevel

 $1 \text{ box} = 2.23 \text{m}^2 = 8 \text{ planks}$






AC5 -



Titan Vinyl Glue planks are a cost effective option, when you don't want to compromise on the look and durability of your floor. With 16 fashionable designs there's a Titan Vinyl Glue decor to suit every room in your home.

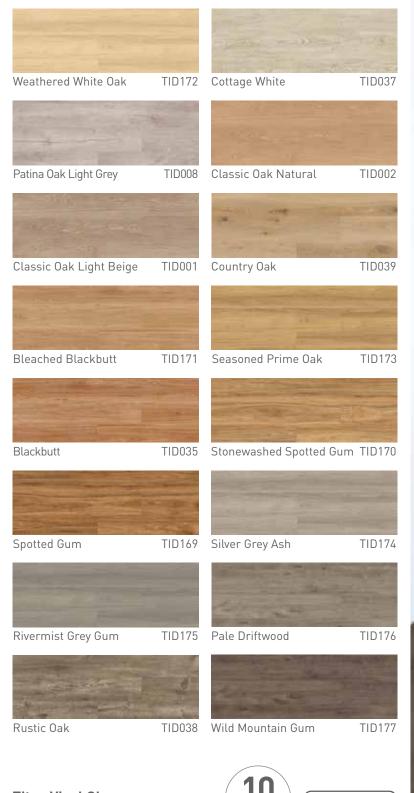



Titan Vinyl Glue

1505 x 185 x 2mm | no bevel $1 \text{ box} = 1.62 \text{m}^2 = 6 \text{ planks}$




class 3

AC4 -





Large format click planks with a rigid core, ideal for mildly uneven subfloors.

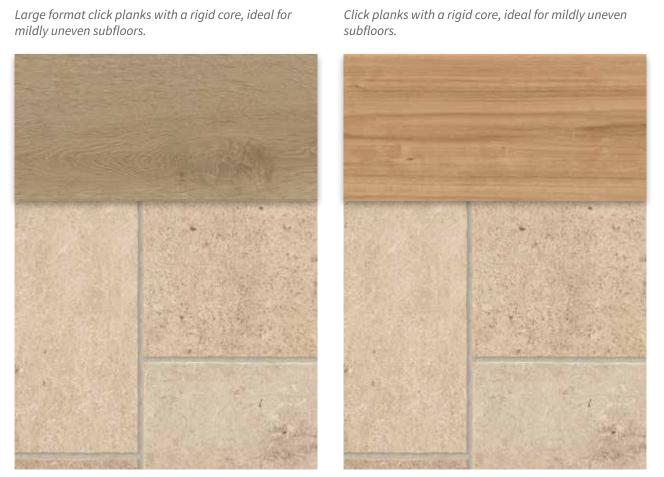

Subfloor	Mildly regular subfloor Minimal floor preparation needed	Mildly regular subfloor Minimal floor preparation needed		
Installation	PATENTED TECHNOLOGY	PATENTED TECHNOLOGY		
Residential warranty	20 years	20 years		
Walk noise reduction	$\bullet \bullet \bullet \bigcirc$	$\bullet \bullet \bullet \bigcirc$		
Plank size	1800 x 225mm	1500 x 180mm		
Plank thickness	6mm (including 1mm built-in underlay)	6mm (including 1mm built-in underlay)		
Wear layer	0.50mm - Class 33	0.50mm - Class 33		





Extra thick, glue down planks for softness and comfort.



Thin glue down planks ideal for a cost effective renovation project.



Level subfloor Floor preparation needed	Level subfloor Floor preparation needed
Glue	Glue
15 years	10 years
$\bullet \bullet \bullet \bullet$	$\bullet \bullet \circ \circ$
1505 x 185mm	1505 x 185mm
5mm	2mm
0.55mm - Class 33	0.30mm - Class 32



Titan Hybrid offers a complete solution with perfectly matching accessories for a beautiful finish of your floor.



Scotia TIVSCOT(-) 2400 x 15 x 15mm Discreet 15mm matching and waterproof scotia



Stair Nose TIVSTP(-) 2400 x 110 x 36mm Matching 'custom look' stair nose to finish stairs beautifully



Expansion Cover TIVEXC(-) 2400 x 45mm Matching low profile and waterproof expansion cover



End profile RVE3.4CH 6mm end profile in champagne finish enabling transitions to floor coverings such as carpet,windows frames and walls



Product Specification Standard

Titan Titan Titan





Vinyl Category		SPC plank	SPC plank	Glue down LVT	Glue down LVT
Dimensions		1800 x 225mm	1500 x 180mm	1505 x 185mm	1505 x 185mm
Total Thickness	EN ISO 24346	6mm	6mm	5mm	2mm
Wear Layer Thickness	EN ISO 24340	0.50mm	0.50mm	0.55mm	0.30mm
Usage Class	EN ISO 10874	Class 33 - AC5	Class 33 - AC5	Class 33 - AC5	Class 32 - AC4
Pack Size		1.62m² (4 planks)	1.62m² (6 planks)	2.23m² (8 planks)	5.01m2 (18 planks)
Pack Weight		16kg	16.5kg	19.4kg	16.5kg
Pallet Size		90.72m² (52 packs)	84.24m² (52 packs)	144.75m² (65 packs)	325.78m² (65 packs)
Pallet Weight		930kg	890kg	1222kg	1073kg
Density	EN 436	2000kg/m3	2000kg/m3	N/A	N/A
Surface Treatment		UV (anti-bacterial)	UV (anti-bacterial)	PU (anti-bacterial)	PU (anti-bacterial)

Physical Property Test Method

EN ISO 23999	≤0.25%	≤0.25%	≤0.15%	≤0.25%
EN ISO 23999	≤1mm	≤1mm	≤1mm	≤2mm
EN 16511	≤400mm: ≤0.25mm ≥400mm: ≥0.35mm	≤400mm: ≤0.25mm ≥400mm: ≥0.35mm	≤400mm: ≤0.25mm ≥400mm: ≥0.35mm	≤400mm: ≤0.25mm ≥400mm: ≥0.35mm
EN ISO 24343-1	≤0.1mm	≼0.1mm	≼0.1mm	≤0.1mm
EN ISO 105-B02	≥6	≥6	≥6	≥6
EN ISO 140-7	6 star Certificate available	<mark>6 star</mark> Certificate available	4 star	3 star
AS/NZS4586 2004	P3	P3	P2	P2
EN660-2 / EN16511	Group T / AC5 (0.50)	Group T / AC5 (0.50)	Group T / AC5 (0.55)	Group T / AC4 (0.30)
AS/ISO 9239.1-2003	10.7 kW/m² Smoke 81%	10.7 kW/m² Smoke 81%	8.7 kW/m² Smoke 168%	6.4 kW/m² Smoke 118%
EN 1815	≤2KV	≤2KV	≤2KV	≤2KV
	Low VOC	Low VOC	Low VOC	Low VOC
	Ortho-phthalate free	Ortho-phthalate free	Ortho-phthalate free	Ortho-phthalate free
Domestic use	20 year wear warranty	20 year wear warranty	15 year wear warranty	10 year wear warranty
	EN ISO 23999 EN 16511 EN 16511 EN ISO 24343-1 EN ISO 105-B02 EN ISO 140-7 AS/NZS4586 2004 EN660-2 / EN16511 AS/ISO 9239.1-2003 EN 1815	EN ISO 23999 ≤1mm EN ISO 23999 ≤400mm: ≤0.25mm EN 16511 ≤400mm: ≥0.35mm EN ISO 24343-1 ≤0.1mm EN ISO 24343-1 ≤0.1mm EN ISO 105-B02 ≥6 EN ISO 140-7 6 star Certificate available AS/NZS4586 2004 P3 EN 660-2 / EN16511 Group T / AC5 (0.50) AS/ISO 9239.1-2003 10.7 kW/m² Smoke 81% EN 1815 ≤2KV Low VOC Ortho-phthalate free Domestic use 20 year wear	EN ISO 23999 <1mm <1mm EN ISO 23999 <1mm <400mm: <0.25mm EN 16511 <400mm: <0.25mm >400mm: <0.25mm EN 150 24343-1 <0.1mm <0.1mm EN ISO 105-B02 >6 >6 EN ISO 105-B02 >6 >6 EN ISO 140-7 6 star Certificate available 6 star Certificate available AS/NZS4586 2004 P3 P3 EN 660-2 / EN16511 Group T / AC5 (0.50) Group T / AC5 (0.50) AS/ISO 9239.1-2003 10.7 kW/m² Smoke 81% Smoke 81% EN 1815 <2KV <2KV Low VOC Low VOC Ortho-phthalate free Domestic use 20 year wear 20 year wear	EN ISO 23999 <1mm <1mm <1mm <1mm EN ISO 23999 <1mm <400mm: <0.25mm <400mm: <0.25mm <400mm: <0.25mm EN 16511 <400mm: <0.35mm >400mm: >0.35mm >400mm: >0.35mm >400mm: >0.35mm EN ISO 24343-1 <0.1mm <0.1mm <0.1mm <0.1mm EN ISO 105-B02 >6 >6 star certificate available >6 EN ISO 140-7 6 star Certificate available 6 star Certificate available 6 star Certificate available 4 star AS/NZS4586 2004 P3 P3 P2 EN 160 9239.1-2003 10.7 kW/m² Smoke 81% Smoke 168% EN 1815 <2KV <2KV <2KV <2KV Low VOC Low VOC Low VOC Low VOC Low VOC Domestic use 20 year wear 20 year wear 15 year wear

Premium

www.premiumfloors.com.au

Front cover: TIRXXL1045 Tasmanian Oak. Back cover: TIR179 - Frosted Ironbark. Product images may differ from actual product. The availability of products, or the products themselves may change at any time without notice. Content © 2019-2020 by Premium Floors Australia Ltd., Australia and Floorscape Ltd., New Zealand. All rights reserved. The contents of this brochure may not be reproduced in whole or in part without prior written permission from the publisher.

Titan

11

14