




NATURAL STONE

Profile

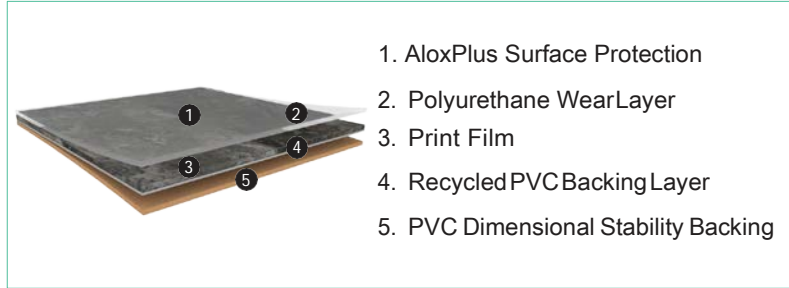

1. AloxPlus Surface Protection
2. Polyurethane Wear Layer
3. Print Film
4. Recycled PVC Backing Layer
5. PVC Dimensional Stability Backing

Applications

- Retail Fitouts
- Galleries
- Cafes / Restaurants
- Hotels

Sustainability

Natural Stone is made with 28% pre-consumer recycled content and is free from Heavy Metal Substances.

Technical Specifications

Physical Properties

Wear layer		0.35mm
Thickness		2.0mm
Size		457mm x 457mm
Qty per carton	457mm x 457mm	16
M ² per carton		3.34M ²
AloxPlus surface treatment		Yes
Underfloor heating		Suitable

Features

- 0.35mm wear layer
- Wide range of designs and colours
- AloxPlus advanced surface protection for ease of maintenance
- 17 year heavy residential warranty
- 5 year light commercial warranty

Test Results

Test		Standard	Result
Slip resistance	All tiles	AS/NZS 4586:2004	R9
Fire behaviour	Critical radiant flux	AS/ISO 9239.1:2003	10.7kw/M ²
	Smoke value	AS/ISO 9239:2003	53%
Residual indentation		EN433	0.05mm
Castor chair suitability		EN425	Yes
Performance classification		EN685	33
Static load limit		ASTM F970	1000psi
Dimensional stability		ASTM-F 2199	Pass, <0.1%
Chemical resistance		ASTM F925	No change
Colour fastness (heat)		ASTM F1514	Pass
Colour fastness (light)		ASTM F1515	Pass